
FIRE PRODUCT CATALOGUE





CONTENTS

- 1. DRY CHEMICAL POWDER EXTINGUISHERS
- 2. CARBON DIOXIDE EXTINGUISHERS
- 3. FOAM & WATER EXTINGUISERS
- 4. TROLLEY UNITS
- 5. HOSE REELS
- 6. LAY FLAT HOSES
- 7. COVERS & HYDRANT VALVES
- 8. EXTINGUISHER HEAD VALVES
- 9. STEEL CABINETS
- **10. FIBRE GLASS CABINETS**
- **11. VEHICLE BRACKETS**
- 12. STANDARD BRANCH PIPES (NOZZLES)
- 13. ANGUS FIRE
- 14. SYMBOLIC SAFETY SIGNS
- 15. PRODUCT LIST

Natfire Dry Powder Extinguisher 04504N 40% MAP Powder

- Full Weight: 7,55kg
- Fill Weight: 9kg
- Empty Weight: 4,7kg
- Packed Dimension: 200 x 200 x 650mm
- Cylinder Height = 480mm
- Complete Height including Valve: 590mm
- Shell Diameter: 190mm
- Propellant: Nitrogen (N₂) gas
- Test Pressure: 3000kPa
- Working Pressure: 1400kPa
- Class Fire: A, B & C
- Fire Rating: 40% 43A, 233B

Natfire Dry Powder Extinguisher 09004N 40% MAP Powder 09009N 90% MAP Powder

- Full Weight : 13,7kg
- Fill Weight : 9kg
- Empty Weight : 4,7kg
- Packed Dimension: 200 x 200 x 650mm
- Cylinder Height = 480mm
- Complete Height including Valve: 590mm
- Shell Diameter: 190mm
- Propellant: Nitrogen (N₂) gas
- Test Pressure: 3000kPa
- Working Pressure: 1400kPa
- Class Fire: A, B & C
- Fire Rating: 40% 43A, 233B



DRY POWER EXTINGUISHER

NNational

Natfire

ROLLIFREE DEDE

National Natfire

02504N 2.5 kg DCP Extinguisher (40% MAP)

Full Weight : 4,4kg Fill Weight : 2,5kg Empty Weight : 1,9kg Packed Dimension: 330 x 225 x 570mm Cylinder Height = 400mm Complete Height including Valve: 495mm Shell Diameter: 105mm Propellant: Nitrogen (N₂) gas Test Pressure: 3000kPa Working Pressure: 1400kPa Class Fire: A, B & C Fire Rating: 40% 13A, 89B

SABS

Natfire

LL FREE 0800 11 62

01004N 1 kg DCP Extinguisher (40% MAP)

Full Weight : 2kg Fill Weight : 1kg Empty Weight : 1kg Packed Dimension: (9 cylinders) 265 x 265 x 360mm Cylinder Height = 300mm Complete Height including Valve: 355mm Shell Diameter: 75mm Propellant: Nitrogen (N2) gas Test Pressure: 3000kPa Working Pressure: 1400kPa Class Fire: A, B & C Fire Rating: 40% 13A, 34B

01504N 1.5 kg DCP Extinguisher (40% MAP)

Full Weight : 2,8kg Fill Weight : 1,5kg Empty Weight : 1,3kg Packed Dimension: 330 x 230 x 355mm Cylinder Height = 280mm Complete Height including Valve: 340mm Shell Diameter: 75mm Propellant: Nitrogen (N₂) gas Test Pressure: 3000kPa Working Pressure: 1400kPa Class Fire: A, B & C Fire Rating: 40% 13A, 34B

> National Fire supplies various MAP and Purple K Powders

SABS

Natfire

Customs Tariff Code: 8424.10| Approved SABS Specification No Cylinder - Power SANS 1910; 2009| Approved SABS Specification No Powder SANS 1522; 2004

INCOMENTAL COLOR STREET

Natfire

05365N 5kg CO₂ Alloy Extinguisher

Full Weight: 14,2kg Fill Weight: 5kg Empty Weight: 9,2kg Packed Dimension: 130 x 230 x 760mm Cylinder Height = 560mm Complete Height including Valve: 660mm Shell Diameter: 130mm Test Pressure: 20 000kPa Working Pressure: 16 900kPa Class Fire: B & C Fire Rating: 70B



05355N 2kg CO₂ Alloy Extinguisher

SAB

Full Weight: 6,7kg Fill Weight : 2kg Empty Weight : 2kg Packed Dimension: 150 x 130 x 560mm Cylinder Height = 440mm Complete Height including Valve: 555mm Shell Diameter: 110mm Test Pressure: 20 000kPa Working Pressure: 17 400kPa Class Fire: B & C Fire Rating: 21B

05361

Natfi

Natfir

5kg CO2 Aluminium Extinguisher

Full Weight: 12kg Fill Weight: 5kg Empty Weight: 5kg Packed Dimension: 160 x 230 x 690mm Cylinder Height = 580mm Complete Height including Valve: 680mm Shell Diameter: 140mm Test Pressure: 16 900kPa Working Pressure: 16 900kPa Class Fire: B & C Fire Rating: 70B

05351

Natfir

2kg CO2 Aluminium Extinguisher

Natfir

Full Weight: 5,5kg Fill Weight: 2kg Empty Weight: 3,5kg Packed Dimension: 113 x 190 x 500mm Cylinder Height = 400mm Complete Height including Valve: 500mm Shell Diameter: 115mm Test Pressure: 20 000kPa Working Pressure: 17 400kPa Class Fire: B & C Fire Rating: 21B

Customs Tariff Code: 8424.10 | Approved SABS Specification No: SANS 1567 2011

CARBON DIOXIDE FIRE EXTINGUISHERS

09030W 9ltr Foam Fully Lined

Full Weight: 13.4kg Fill Weight : 9kg Empty Weight : 4.4kg Packed Dimension: 540 x 200 x 190mm Cylinder Height = 480mm Complete Height including Valve: 590mm Shell Diameter: 190mm Content: Foam AFFF Propellant: Nitrogen Test Pressure: 3 000kPa Working Pressure: 1 400kPa Class Fire: A B

05616 9ltr Water Fully Lined

SABS

Full Weight: 13.7kg Fill Weight : 9kg Empty Weight : 4.7kg Packed Dimension: 540 x 200 x 190mm Cylinder Height = 480mm Complete Height including Valve: 590mm Shell Diameter: 190mm Propellant: Nitrogen Test Pressure: 3 000kPa Working Pressure: 1 400kPa Class Fire: A



Customs Tariff Code: 8424.10 | SABS Permit No: SANS 1910; 2009

06005W *6ltr Fry Fighter*

Natfire

Natfir

6

PILLENT PILL

AN AT LASS OF THE

TRAFFIC LIVER

TEL:(011) \$21-0581

Full Weight: 9.68kg Fill Weight : 6kg Empty Weight : 3.68kg Packed Dimension: 570 x 170 x 190mm Cylinder Height = 370mm Complete Height including Valve: 520mm Shell Diameter: 170mm Propellant: Nitrogen Test Pressure: 3 000kPa Working Pressure: 1 400kPa Class Fire: F

OTHER FIRE EXTINGUISHERS

Natfire

05498 **50**kg DCP Trolley Unit 40% Full

Natfire

Full Weight: 87kg Fill Weight : 50kg Empty Weight : 50kg Packed Dimension: 360 x 360 x 1112mm Height = 860mm Shell Diameter: 300mm Propellant: Nitrogen gas Test Pressure: 30BAR Working Pressure: 14BAR Periodic Test Pressure: 3 000 Class Fire: A B C

SABS

Other $\rm CO_2$ Trolley Units available on Request: 10kg, 20kg, 45kg $\rm CO_2$

05480 25kg DCP Trolley Unit 40% Full

Full Weight: 47.15kg Fill Weight: 25kg Empty Weight: 22kg Packed Dimension: 330 x 330 x 97 0mm Height = 650mm Shell Diameter: 250mm Propellant: Nitrogen gas Test Pressure: 30BA R Working Pressure: 14BAR Periodic Test Press ure: 3 000 Class Fire: A B C

5085

Natfire

National supplies Various MAP and Purple K Powde

Customs Tariff Code: 8424.10 | Approved SABS Speci fication No: SANS 11601 2005

TROLLEY UNITS

08407W Complete Hose Reel 30m PVC

SABS

Dimensions: 580mm diameter, Height with Valve 750mm, Wall Projection 260mm Weight: Frame with valve 10.5kg, with 30m PVC hose 23kg Hose: Available in SABS approved PVC / Rubber EN694 Hose Dimensions: 30meters 19mm ID (Standard) Swinging Type: 170/180° minimum Valve (stop cock): Chronium plated double female 25mm BSP thread Length of Jet: 14m (jetspray), 7.2m (conical spray) at standard pressure of 0.2MPa Maximum Working Pressure: 1.2MPa

08411N Swingway Complete 30m PVC

Dimensions: 580mm diameter, Height with Valve 750mm, Wall Projection 260mm Weight: Frame with valve 10.5kg, with 30m PVC hose 23kg Hose: Available in SABS approved PVC / Rubber EN694 Hose Dimensions: 30meters 19mm ID (Standard) Swinging Type: 170/180° minimum Valve (stop cock): Chronium plated double female 25mm BSP thread Length of Jet: 14m (jetspray), 7.2m (sheet spray), 4m (conical spray) at standard pressure of 0.2MPa

Maximum Working Pressure: 1.2MPa

Customs Tariff Code: 3917.40 | Approved SABS Specification No: SANS 543;2004

HOSE REELS

Firecheck – PVC (Red / Blue)

Firecheck is a non-percolati ng fire hose with a robust, all-synthetic jacket. It is designed for use by Fire Brig ades and Industry.

	0					
Inside Diameter:	In ch	1 1/2	1 3/4	2	2 1/2	3
	mm	38	44	50	64	76
Coil Diameter (mm) per 30m len gth		380	380	380	400	410
Mass Gram per metre		180	210	230	290	350
Short Length Bursting kPa		3500	3250	3000	2500	2500
Operating Pressure kPa		1200	1200	1200	1000	1000

Available in long lengths on request Customs Tariff Code: 3917.4 0



Target - Canvas (White)

Target is a canvas non -percolating unco ated bo x hose with a robust polyester jack et.

Inside Diameter:	Inch	1 1/2	1 3/4	2	2 1/2	
	Mm	38	44	50	64	
Coil Diameter (mm) per 30m length		380	380	400	400	1
Mass Gram per metre		170	188	210	- 5	£.
Short Length Bursting kPa		3500	3500	3500	3500	
Operating Pressure kPa		1700	1700	1700	1700	1

Customs Tariff Code: 5909.00

LAYFLAT HOSES

ANGUS DURALINE

atia iaalkat Itik

ANGUS DURALINE

ANGUS DURALN

Forester (White)

suitable for forest and	0	h the oute	· ·	,		
Inside Diameter:	I nch	1 1/2	1 3/4	2	2 1/2	3
	mm	38	44	50	64	76
Coil Diameter (mm) per 30	Coil Diameter (mm) per 30m leng th		380	380	400	410
Mass Gram per metre		180	210	230	290	350
Short Length Bursting kPa	1	3500	3250	3000	2500	2500
Operating Pressure kPa	1	1200	1200	1200	1000	1000
SANS 1456-2:2007 app Customs Tariff Code: 5		Permit No 9	9503/150	066		885

WM X 30M

Mum x 30m



03812 50kg DCP Trolley Unit Cover

03800 9kg DCP f/ext Cover

03814 4.5kg DCP f/ext Cover

21241 Hydrant Valve Right Angle 65 x 80 BSP Tamperproof Dimensions: 15 x 150 x 100mm

Weight: 5kg Body: Brass Outlet Connection: 65mm Coupling Outlet Instantaneous Inlet Connection (screw type): 80mm Male bsp Thread Working Pressure: 1 600kPa Hydrostatic Pressure Test: 2 000kPa Opening Mechanism (Tamperproof): Key

03802 Hose Reel Complete Cover

21239 Hydrant Valve Right Angle 60 x 80 BSP

Dimensions: 15 x 150 x 100mm Weight: 5kg Body: Brass Outlet Connection: 65mm Coupling Outlet Instantaneous Inlet Connection (screw type): 80mm Male bsp Thread Working Pressure: 1 600kPa Hydrostatic Pressure Test: 2 000kPa Opening Mechanism (STD): Hand Wheel

COVERS / HYDRANTS

Covers - Customs Tariff Code: 3926.90.90 / Hydrants & Valves - Customs Tariff Code: 8481.80.90



03182 4.5 / 9kg DCP Fire Extinguisher Cabinet - Single

Dimensions: 30 x 26 x 75cm



STEEL CABINETS

F03186 9kg DCP Fire Extinguisher Cabinet -



Dimensions: 850 x 320 x 840mm Weight: 7.4kg

F03134 9kg DCP Fire Extinguisher Cabinet

Dimensions: 340 x 280 x 850mm

Steel Cabinets / Fibre Glass Cabinets - Customs Tariff Code: 8304.00 / Extinguimate Cabinets - Customs Tariff Code: 3926.90.90

FIBRE GLASS CABINETS



Vehicle Brackets - Customs Tariff Code: 8424.90

VEHICLE BRACKETS



Branchpipes – Customs Tariff Code: 400942

BRANCHPIPES



Duraline Layflat Hose

Features specially formulated high grade synthetic rubber extruded through an all polyamide woven jacket to give a non-kicking construction and the best rubber-to-textile adhesion that modern technology can achieve.

Appro vals: Kite marked to BS 6391 Type 3 | ULListed to UL19| UK Maritime & Coastguard Agency | Det Norske Verita s | German DIN 14811 | Swedish SS2840 | Norwegian NS 4017/8 | Swiss SFV 2

Inside Diameter:	Inch	1	11/2	31/4	2	2 1/2	2 3/4	3	
	mm	25	38	45	51/52	64/65	70	75/76	A101801
Standa rd Colour*		Red	Red	Red	Red	Red	Red	Red	/
Weight kg/m**		0.2	0.29	0.33	0.4	0.47	0.55	0.68	
	m/20m	0.37	0.38	0.4	0.42	0.43	0.45	0.45	
Coil Di ameter**	m/23m	0.37	0.4	0.44	0.45	0.46	0.49	0.49	
	m/30m	0.39	0.43	0.46	0.48	0.48	0.51	0.51	
Averag e Short Length Vurst Pressure									
(bar)		60	55	50	50	48	47	46	
Nomin al 2.1 Safety Ration Maximum									
Advise d Working Pressure***		22.5	22.5	22.5	22.5	22.5	22.5	22.5	
Temp Range ∘C	Temp				-20 to +50				Statement Statement
Terrip Kallige °C	Arctic				-40 to +50				

DORALINE

ANGUS DURAL

BS 639]:2

A101501 o-

*Other colours available on request. | **Excluding couplings | ***Or maximum working pressure of attached coupling, whichever is the lower.

Custom s Tariff Code: 4009.42

X 30 M

Mann x 30 m

A101101

Low Expansion Foam Branchpipes

The Angus series of low expansion foam branchpipes has been designed with long range performance in mind. There are three basic models with nominal foam solution throughputs of 225, 450 and 900 litres / mm at 7 bar. Selfinducing models are available in the 225 and 450 litre / minute versions,

All models produce finished foams of nominal expansion 10 : 1 and give foam streams of an exceptional range. To get the best results from these branchpipes we recommend use with either FP70 Plus Fluoroprotein foam or Alcoseal AR-FFFP multi-purpose foam concentrate

Stock Code:	Branchpipe	Pressure at Branchpipe bar	Nominal Flo _W Litres / mm	Range Metre
	F.225/HU	3.5	160	12
A101101	Use Type 225 uniductor			
A101101	with above model	5.3	195	17
	F.225/SI	7.0	225	20
A101501	F.450/HU	3.5	320	15
	Use type 450 uniductor			
	with above model	5.3	390	18
A101801	F.900/HU	3.5	724	18
	Use type 900 uniductor	5.3	891	21
	with above model	7.0	1024	24

Approvals: Underwriters Laboratories I nc: F.225/HU; Lloyd's Register of Shipping: F.225/HU, F.225/SI, F.450/HU; Maritime and Coast guard Agency: F.225/HU, F.225/SI, F.450/HU

ANGUS FIRE

MGUS DURALINE

980801 Foam Alcoseal 3-6 25L 982204 Foam Alcoseal 3-6 200L 982203 Foam Alcoseal 3-6 1000L

Alcoseal 3-6 is a superior quality Alcohol Resistant Film-Forming FluoroProtein (AR-FFFP) fire fighting foam concentrate for extinguishing and securing flammable hydrocarbon and polar solvent liquid fires. Approvals And UL Listings: Alcoseal 3-6 is tested and certified to EN1568: 2008 Parts 3&4, UL Listings including a "Triple Listing" as a FluoroProtein, AFFF, and Alcohol Resistant Foam. Tested to ICAO Level B Performance.

980501 Foam Alcoseal 3-3 25L 982304 Foam Alcoseal 3-3 200L 982305 Foam Alcoseal 3-3 1000L

Alcoseal 3-3 is a superior quality Alcohol Resistant Film-Forming FluoroProtein (AR-FFFP) fire fighting foam concentrate for extinguishing and securing flammable hydrocarbon and polar solvent liquid fires. *Approvals And UL Listings: Alcoseal 3-3 has numerous*

approvals and UL Listings including a "Triple Listing" as a FluoroProtein, AFFF, and Alcohol Resistant Foam.

980201 Foam FP70 25L 981604 Foam FP70 200L 981606 Foam FP70 1000L

FP70 is a superior quality fluoroProtein (FP) fire fighting foam concentrate for extinguishing and securing flammable hydrocarbon liquid fires

Approvals And Listings: FP70 has numerous approvals and UL Listings. Independently Tested and Certified to EN1568: 2008 Part 3





ANGUS FIRE

SYNTHETIC FOAM

981401 Foam Tridol C 3% 25L 981404 Foam Tridol C 3% 200L 981405 Foam Tridol C 3% 1000L

Aquesous Film-Forming Foam (AFFF) Concentrate: 1. Cost-effective; 2. Highly versatile; 3. Film-forming for fast flame knockdown and extinguishment; 4. Burnback resistance and post-fire security *Approvals: Tridol C 3 is UL Listed. Independently*

981101 Foam Tridol C 6% 25L 982504 Foam Tridol C 6% 200L 982505 Foam Tridol C 6% 1000L

Synthetic Aquesous Film-Forming Foam (AFFF) Concentrate: 1. Film-forming for fast flame knockdown and extinguishment; 2. Burnback resistance and post-fire security; 3. Environmental *Approvals: Tridol C 6 is UL Listed.*

982401 Foam Tridol S 3% 25L

982404 Foam Tridol S 3% 200L

982405 Foam Tridol S 3% 1000L

Synthetic Aquesous Film-Forming Foam (AFFF) Concentrate: 1. Film-forming for fast flame knockdown and extinguishment; 2. Burnback resistance and post-fire security; 3. Environmental *Approvals: Tridol C 6 is UL Listed.*

981501 Foam Tridol S 6% 25L

981502 Foam Tridol S 6% 200L

981505 Foam Tridol S 6% 1000L

Synthetic Aquesous Film-Forming Foam (AFFF) Concentrate: 1. Film-forming for fast flame knockdown and extinguishment; 2. Burnback resistance and post-fire security; 3. Environmental

Approvals and UL Listings: Tridol S 3 has numerous approvals and UL Listings. Independently tested and certified to EN1568:2008 Part3, Tested to ICAO Level B Performance


101307 Foam Tridol ATF 1-3 25L 101308 Foam Tridol ATF 1-3 200L 101309 Foam Tridol ATF 1-3 1000L

Tridol ATF 1-3 is a cost-effective Alcohol Resistant Aqueous Film-Forming Foam (AR-AFFF) concentrate for extinguishing and securing flammable hydrocarbon and polar solvent liquid fires. *Approvals and UL Listings: Tridol ATF 1-3 is UL Listed, Independently tested and certified to EN1568:2008 Parts 3&4, Tridol ATF 1-3 has been LASTFIRE tested*


ANGUS FIRE



PHOSPHORESCENT (GLOW IN THE DARK), REFLECTIVE ON ABS OR CHROMADEK

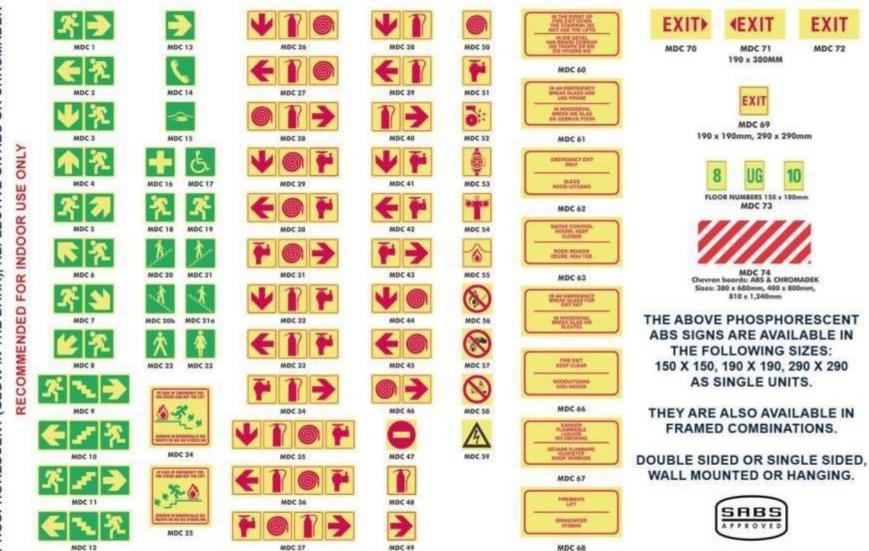

SYMBOLIC SAFETY SIGNS

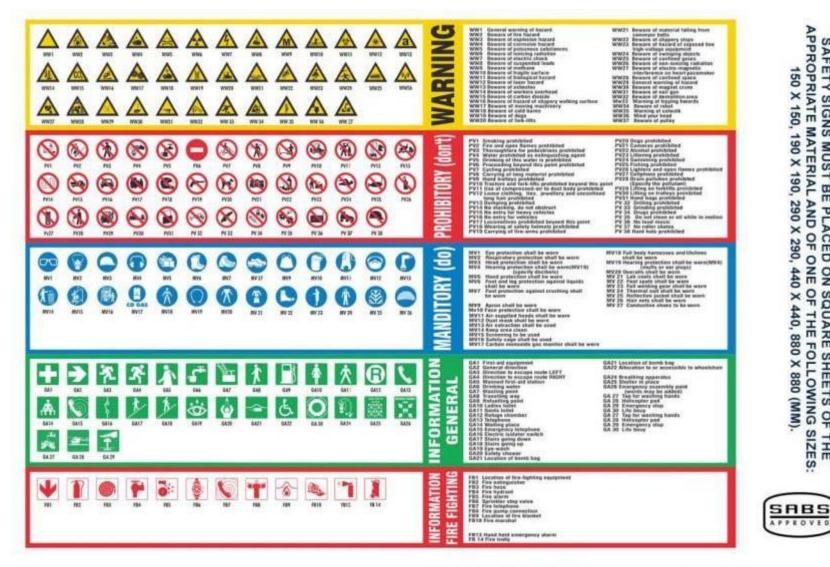

SYMBOLIC SAFETY SIGNS

ALARM

- 36519 Alarm Supersound Box 01310
- Alarm Supersound Complete in Box HS code: 8531.10 Alarm Supersound Rotel Canister
- 01313 Smoke Alarm Kidde Model 19040 HS code: 902710

BACKING BOARDS

HS CODE: 4421.90.90

- 02400 Backboord Small 03451 **Backboard Modium**
- 03402 Backboard Large

BLANK CAP

63230 Blank/cap 65mm PVC MALE Blankicap 65mm PVC Female 03234 Blankicap 65mm Gun Mintal MALE

BOLT REDLAM

18000 Redam Bott Complete (Excludes Glass) 18001 Rediant Bolt Glass Tube 18002 Rediate Bolt Hammer & Chain

BRACKETS EXTINGUISHER

HS CODE: 7326.90.10

02579	Bracket J		
02582	Bracket U	ti	Not
02583	Brackel U	ŧi	No 2
02584	Bracket U	ń	No.3

BRACKETS VEHICLE

HS CODE 8424.90

Bracket weh for 1,0kg Ext. 39064 39066 Bracket yeth for 1,0kg Ext Short 36054 Bracket well for 1,5kg Ext Short 37825 Bracket weh for 2.5kg Ext Heavy Duty 02569 Bracket weh for 2,0kg Ext 39060 Bracket veh for 4,5kg Ext 02574 Bracket Veh for 5kg CO, 39062 Bracket with for 9kg Eid 000407 Bracket web for 9kg Ext Extrs Heavy Duty 39069 Bracket veh for 9kg Ext Narrow Body

BRANCHPIPE

HS CODE: 400942

02639 Branchpipe 66mm inst UA 02651 Branchpipe 65mm 9mm J/S-awg #1 02648 Branchpipe 65mm 16mm J/D-awg #2 02549 Branchpipe 65mm 16mm J/S+C-awg #20 M980553 Branchpipe V12 - ANGUS

BREECH DIVIDING & COLLECTING

M181901 Breech Collecting 65mm L/A STD M102001 Breach Dividing 65mm L/A STD

Pg 22 - 23

BUCKETS

HS CODE: 7326.90.90

02740 Bucket fail bottom 02741 Bucket round bottom

CABINETS

Cabinet Extinguimate 03185

Cabinet Extinguimate 4,5kg 03186 Cabinet Extinguimate Skg 03817 Cover Extinguimate CP Valve

Cabinet Fiberglass H\$ CODE: 8304

- Cabinet Ext 9kg Lockable Door 103134 03196 Cabinet Ext 9kg Sliding Deer
- Cabinet Hose Layful Wall Mountait 03171
- 03173 Cabinet Hose Relii Open Back

Cabinet Steel - Bubble Wrapped HS CODE: 8304

- 03150 Cabinet Hose Reel Open Back 03163 Cabinet Layfal Hose Wall Mounted 109931 Cabinet Legs for F03160
- 03174 Cabinet Extinguisher Skg CO 03168 Cabinet Extinguisher Couble 9kg/4 5kg
- 03182 Cabinet Extinguisher Single 9kg/4,5kg

CLAMPS

37949 Clamp Hose Reel - T16/25-

COUPLINGS - LAY FLAT HOSE

HS CODE: 7307.99.90

M961134 Coup 38mm x 38mm - LA 03674 Coup 38mm x 65mm · LA M100103 Coup 38mm x 85mm - LA M100104 Coup 45mm x 65mm - LA 0.9687 Coup 65mm x 65mm - LA M100105 Coup-65mm x 65mm - LA M100108 Coup 39mm x 65mm - GM M100106 Coup 45mm s 65mm - GM M100107 Coup 65mm s 85mm - GM

COVERS

HS CODE: 3926.90.90

03832 Cover Solid Trolley Unit 03814 Cover Ext 4.5kg PVC 03880 Cover Ext Wag PVC 03802 Cover Hose Reel PVC 03903 Cover Hose Reel Sileel CP Valve

EXTINGUISHERS

HS CODE: 8424.10

DRODEN Ext (L. Fry Fighter 05355N Exil CO, Chutb 2kg Alky 105301 Ext CO, Chubb 2kg Aluminium 05365N Ext CO, Chubb Skg Alloy 0536t Ext CO, Chubb Skg Aluminium Ext DCP 1/3kg 40% Chubb 01004N 01504N Ext DCP 1.5kg 40% Chubb Ext DCP 2.5kg 40% Chubb 02504N 04504N Ett DCP 4.5kg 40% Chubb 09004N Ext DCP 9kg 40% Chutte 19009N Ext DCP 9kg 90% Chubb 09030N Ext Foam 9L Fully Lined 05618 Ed Water 9L Fully Lined

FIRE BEATERS

26170 Fire Boater Aluminium Handle 38172 Fire Beater Wooden Handle

FIRST AID KITS & REFILLS

HS CODE: 3006.50 Closer Advanced Likelying Sciences

	CON MEDIA WOR WOATEN
19488	Box PVC 3 Tray
19489	Refit Regulation 3
33856	Field Upgrade Nt for Regulation 7
15388	Uphicks Proposition Mill in Double

GAUGE / PRESSURE SETS

HS CODE: 8424.90

17200	Galage P	tessure	Ferris	Steamor	2500 %	Pa)

- 07203 Gauge Pressure S/P 1/8" NPT 33007 Gauge Pressure S/P Mt0 x 1.0 + O ring
- 05431 Stopcick for Gauge 10mm
- 20451 U lube for Gauge & Stopcock (07200 & 03431)

GLASS REPLACEMENTS

03804	Class for CP Valve Cover 225x186rom
11146	Glass for Keybox 110x80mm
11149	Glass for Keybox 139096mm
11150	Glass for Steel Cabinet 110x110mm

HAND WHEELS

22161	Handwheel	Hydrard \	/alvo Flad
22165	Hindwheel	CP Valve	Chrome

HORN CO.

HS CODE: 8424.90

30741 Hom & Swivel 2kg CO, Alum

HOSE - DISCHARGE

1080	Hose Discharge & Hom CO, Comple	h
9488	Hose Discharge 4 Skg DCP	
5489	Hose Discharge 9kg DCP	
6586	Hose Discharge CO, Tillinit	

HOSE - LAYFLAT

Firecheck Range HS CODE: MOS #2

HSCU	DE: 4009.42
08605	Hose - Firecheck Blue 65x30m c/w LA Coupling
21242	Hose - Firscheck Blue 65c30m No Coupling
06537	Hose - Firecheck Red 38x30m clw LA Coupling
06552	Hose - Finischeck Red 38x30m No Coupling
38619	Hose - Firecheck Fied 65x30m c/w GM Coupling
08607	Hose - Firecheck Red 65x30m clw LA Coupling
06572	Hose - Firecheck Red 65x30m No Coupling

Target Range HS CODE: 3917.40

8548	Hose - Target 38x30m cW LA Coupling
8546	Hose - Target 38x30m No Coupling
8547	Hose - Target 65x30m c/w LA Coupling
8542	Hose - Target 65x30m No Coupling
980401LA	Hose - Forester 65x30 ctv LA Coupling

Hose Reel Range

08520 Hose PVC 19mm ID (30m lengths) 08510 Hose PVC 19mm ID (30m lengths) 08511 Hose Rubber 19mm (D (30m lengths)

HOSE REEL

- 08407W Hose Reel 30M PVC Complete Chubb HB CODE: 3926.90.90 08459 Hose Reel 30M PVC Stainlets Steel Complete
- 08411N Hose Reel 30M Swingway Complete Natire
- Hose Reel 30M Rubber Complete Chubb 08403N Hose Reol Frame Only Chubb
- 08450N 32025 Hose Reel Waterway Assembly
- 32040 Hose Reel Run-Out Guide

HYDRANT WALVES HS CODE:8481.80.90

21239

- Hydrant Valve RVA 65 x 80 BSP 21241 Hydrant Valve RIA 65 x 80 Tanger Proof BSP
- 19711 Standpipe LRT Single outlet 19713 Standpipe Bayonet single-outlet

KEYBOX

11145 Keybox Steel

KEVS.

11147 Key Steel Cabinet 11148 Lock Steel Cabinet 11139 Key Tamper Proof Hydrant Valve - 4 Way 11155 Kiny Tamper Proof Hydrant Valve - Woodlands

LABELS - INSTRUCTION

HS CODE: 8310

12172	Label 1,5kg ABC
12171	Label Skg ABC
12163	Label 2,5kg ASC
12290	Label 25kg ABC
12214	Label 2kg CO,
12164	Label 4,5kg ABC
12257	Label 45kg CO
32294	Label 50kg ABC
12215	Label 5kg CO,
12165	Label 9kg ABC
12170	Label Fry Fighter 300 x 170
12220	Label Hose Real
12299	Label Numbering
12118	Label Monthly Inspection

NOZZLE

12201

H\$ CODE 8424.90

15325 Northe Hose Reels - LA 20mm

Label Pressure Test Chubb

- 39292 Nozzle Hose Reels - Nylon 20mm RED 33005 Nozzle Discharge S/P Valve 4/mm
- 33009 Nozzle Discharge S/P Valve 6mm
- Nozzle Foam S/P Ent 30956 30650
 - Nozzle Pistol DCP Shut Off

POWDER - SOLD PER KG HS CODE: 3824.90.90

HS CODE:4016.93.10

Fing O CO,

Powder ABC 90% - per kg

Powder ABC 40% - per kg

Ring O M30 Valve 26,65 x 35.5

Pin Safety SIP valve 4mm

Saai Extinguinate Cablect

Sealing Wire (roll 1kg)

Seal Flastic Yellow

Seal Lead per kg (5.5 thick x 10 Dia)

Seal Plastic (Strp Twist and Pull)

Steamer pump Connector (Booster)

Syphon Tube 4.5kg Ext Wananda

Syphon Tube 2kg CO, Alum 380mm

Syphon Tube 5kg CO, Alum 550mm

T/unit DCP 25kg S/F 40 % ABC full Trunk DCP 50kg S/P 40% ABC full

Titlinit CO, Lance Without hose

Valve CO, Front Exit 25rpm

Valve CO, Side Exit 25/mm

Wee M00 S/P Drop Hendle

Valve MS0 S/P Long Handle

Valve M30 S/P Short Handle

Valve Screw Down 3/4" CO,

Washer Hydrant Clack Rubber

Washer Hydrant Inst (Up washer 65mm)

Valvo Hose Reel CP

Valve Trolley Unit S/P

Washer Fibre CO.

PRODUCT LIST

Syphon Tube 9kg Ext Wasanda

Syphon Tube 50kg 850mm

Pin Saluty CO, 3mmi

17506

37883

RINGO

16533

30838

200159

30840

SEALS

03187

19302

19303

19304

19305

25688

16564

16568

30859

30861

31303

05480

05498

26059

30/18

30719

21335

16500

16517

16520

21333

21361

30909

22156

03418

WASHERS

H5 CODE 8424.90

VALVES

STEAMERS

SYPHON TUBES

TROLLEY UNITS

HS CODE: 8424.10

H5 CODE: 8481.80.90

SAFETY PINS

H5 CODE:8424.90

CONTACT US



061 237 586 / 7

Sales.uss@united.com.na

25 Kalie Roodt Street Northern Industrial Area Windhoek



